

LINCOLN CITY/LANCASTER COUNTY PLANNING STAFF REPORT

This is a combined staff report for related items. This report contains a single background and analysis section for all items. However, there are separate conditions provided for each individual application.

P.A.S.: Hub Hall Heights **DATE:** January 22, 2003
Annexation #02010
Change of Zone #3390
Special Permit for Community Unit Plan #1995
Preliminary Plat #02025

SCHEDULED PLANNING COMMISSION MEETING: **DATE:** February 5, 2003

PROPOSAL: To annex 142 acres, change the zone from AG, Agricultural to R-3, Residential, preliminary plat 356 lots and 5 outlots and obtain a special permit for a community unit plan for 869 dwelling units at NW 48th Street and W Holdrege Avenue.

WAIVER REQUEST: An exception to §26.23.130 to exceed block lengths
An exception to §26.23.140(e) to allow double frontage lots

LAND AREA: Annexation, Change of Zone, Preliminary Plat: 142 acres
Special Permit for CUP 129 acres

CONCLUSION: With conditions the change of zone, preliminary plat, and special permit are in conformance with the Comprehensive Plan. The developer is required to contribute toward the paving of and the cost of the water main in NW 48th Street as part of the annexation.

<u>RECOMMENDATION:</u> Change of Zone	Approval
Preliminary Plat, Special Permit, Annexation	Conditional Approval

GENERAL INFORMATION:

LEGAL DESCRIPTION:

Annexation, Change of Zone & Preliminary Plat: Lots 14 and 32 Irregular Tracts, located in Section 18 T10N R6E.

Special Permit: Lot 14 and a portion of Lot 32 I.T., located in Section 18 T10N R6E and more particularly described in the attached legal description.

LOCATION: Generally located northeast of NW 48th and W. Holdrege Streets

APPLICANT: Hubert H. Hall
2320 S. 48th Street
Lincoln, NE 68506
(402)483-2551

OWNER: Charles Gary Gately Hub Hall
Charles Gary Gately Trust and contract interest in: 2320 S. 48th Street
Highway 15, Inc., a Nebraska Corporation Lincoln, NE 68506
(402)483-2551

CONTACT: Lyle L. Loth Engineering Surveying and Planning
601 Old Cheney Road, Suite A
Lincoln, NE 68512
(402)421-2500

Brian D. Carstens
Brian D. Carstens and Associates
601 Old Cheney Road, Suite C
Lincoln, NE 68512
(402)434-2424

EXISTING ZONING: AG, Agricultural.

EXISTING LAND USE: Undeveloped.

SURROUNDING LAND USE AND ZONING:

North:	Undeveloped, residential	R-3, Residential
South:	Undeveloped	AG, Agricultural
East:	Undeveloped	AG
West:	Undeveloped, residential	R-3, AG

COMPREHENSIVE PLAN SPECIFICATIONS: The Comprehensive Plan shows this area as Urban Residential (page F-25).

The area is identified as Tier 1, priority A (F-31). Development can occur within the next 25 years and is designated for near term development (F-29).

The Comprehensive Plan encourages efforts to preserve small stream corridors in future developments (F-59).

Guiding Principles for New Neighborhoods encourages:

1. Encourage a mix of housing types, single family, townhomes, apartments, elderly housing all within one area;

2. Similar housing types face each other: single family faces single family, change to different use at rear of lot;
3. Parks and open space within walking distance of all residences;
4. Multi-family and elderly housing nearest to commercial area;
5. Pedestrian orientation; shorter block lengths, sidewalks on both sides of all roads;
6. Public uses (elementary schools, churches) as centers of neighborhood – shared facilities (city parks & school sites). (F-67)

HISTORY:

Date when preliminary plat was submitted:	November 6, 2002
Date when Planning Director's letter was sent:	December 10, 2002
Date when revised preliminary plat was submitted:	January 6, 2003
Met with applicant regarding grading and drainage issues:	January 22, 2003

The zone was A-A, Rural and Public Use District until the zone was changed to AG, Agricultural during the 1979 zoning update.

UTILITIES: Utilities are adjacent to this site in NW 48th Street. Extension is required as part of the annexation agreement. A 24" water main is proposed in W. Holdrege Street and a 16" water main is proposed in NW 48th Street. The developer is required to pay half the cost of a 6" water main in both streets. All other water mains are of standard sizing. Standard 8" sanitary sewer mains are shown throughout the development. The developer proposes either a force main or pumping station in the south east corner of the plat. The Public Works & Utilities Department is not satisfied with the proposed lift station.

TOPOGRAPHY: Rolling, with several wooded drainage ditches throughout.

TRAFFIC ANALYSIS: NW 48th Street is currently a paved two-lane rural roadway. The Comprehensive Plan classifies NW 48th Street as a Principal Arterial. The developer is required to pay half the cost of a three lane suburban cross section.

West Holdrege Street is unpaved and unclassified, however, the Comprehensive Plan shows 120' of right-of-way for that portion from NW 48th Street east approximately one quarter mile to about NW 45th Street (F-113). East from that point only 80' of right-of-way is indicated for W. Holdrege Street. The developer is currently showing the dedication of 60' for the entire portion of W. Holdrege. This is not required. Only 40' of right-of-way must be dedicated east of NW 45th Street. Local streets are entirely the responsibility of the developer, who may delay the construction of W. Holdrege with a phasing plan approved by the Planning and Public Works & Utilities Departments.

PUBLIC SERVICE: The nearest fire station #11 in Arnold Heights
The nearest public school is Arnold Elementary School
The nearest public library is the Arnold Heights Library

REGIONAL ISSUES: This area is within the Airport Environs Turning Zone. An Avigation and Noise Easement and Covenant Agreement is required.

ANALYSIS:

1. Public Works & Utilities Department had the following comments:
 - a. The existing culvert in N.W. 48th Street needs to be shown as per the January 22, 2003 meeting with the engineer.
 - b. The sanitary sewer needs to be revised in the northeast corner of the plat. It is currently located under the dam of a proposed detention facility. This is unacceptable.
 - c. Sanitary sewer has not been extended to the property lines at drainage basin entry points into the development as per the Planning Director's letter dated December 10, 2002.
 - d. The proposed alternate to serve the proposed multi-family area with a lift station is unsatisfactory. The multi-family lot cannot be developed until a sewer outlet is available from the east.
 - e. The grading in N.W. 41st Court, West Faesy Street, and N.W. 47th Street needs to be revised as per the meeting January 22, 2003. Due to the large grade changes front to back across several areas on this plat Public Works recommends that the grading plan and /or lot layout be revised to provide more desirable lots for building.
 - f. Public Works does not approve any drive way location for Lot 30 Block 12 (multi-family area) onto W. Holdrege Street until a final site plan and use for the lot is approved.
 - g. The sanitary sewer in NW 47th Street is shown to be 15' deep at the north property line. The sewer will run opposite street grades in NW 47th Street until the first east-west street (W. Thatcher Lane) in the Ashley Heights 1st Addition to the north. This will force the sewer to be deeper than 15'. No waivers of design standards for sewer depth have been approved for the Ashley Heights

1st development. The sewer in this plat must be designed to accommodate the sewer depth at the property line.

- h. The annexation agreement for this plat requires the developer pay for the equivalent of ½ the cost of a 6" water main in NW 48th Street. The developer is required to contribute ½ the cost of a 3-lane suburban cross-section street toward the future urban street paving of NW 48th Street.
2. W. Faesy Place, W. Emily and W. Louse Lanes, W. Megan Court, and W. Jewel Street must be renamed because of existing street names that are similar or the same.
3. §26.23 requires pedestrian access to be provided in blocks that exceed 1000'. Block 4 exceeds this standard and no waiver was requested or advertised. The applicant must show a pedestrian access in this block.
4. The pedestrian easement is shown in Block 12 is proposed in an area with a significant grade change from the front of the lot to the rear. A more level location must be found to accommodate ADA grade requirements for this pedestrian sidewalk.
5. As noted by the Public Works & Utilities Department the general design of the lots in relation to the grading plan is poor. Several lots have a 20' grade difference from front to back. The Comprehensive Plan considers general desirability of lots. In this case, many lots are not desirable and the grading plan must be revised to eliminate steep grade differences.
6. There are several block lengths that do not meet design standards. W. Faesy Place can be extended northeast to NW 44th Street to help alleviate this problem. The engineer agreed to this at the January 22, 2003 meeting with Planning Department staff.
7. The request to waive block lengths is to preserve existing drainage areas which is consistent with the Comprehensive Plans efforts to preserve natural areas.
8. The request to waive double frontage lots is acceptable. The developer is required to provide screening between the rear of lots and the street.
9. Only 40' of right-of-way is required to be dedicated east of NW 45th Street and should be revised to reflect this standard.
10. The developer is required to pave all locale streets within and abutting this plat. W. Holdrege and NW 40th Streets must be paved with curb and gutter. The developer can

delay the construction of these streets by submitting a phasing plan that is found acceptable to the Planning and Public Works & Utilities Departments.

ANNEXATION:

1. After the subdivider completes the following instructions and submits the documents and plans to the Planning Department office, the annexation will be scheduled on the City Council's agenda:
 - 1.1 Sign an annexation agreement.

PRELIMINARY PLAT CONDITIONS:

Site Specific:

1. After the subdivider completes the following instructions and submits the documents and plans and 6 copies to the Planning Department office, the preliminary plat will be scheduled on the City Council's agenda: (NOTE: These documents and plans are required by ordinance or design standards.)
 - 1.1 Revise the preliminary plat to show:
 - 1.1.1 The culvert in N.W. 48th Street to the satisfaction of the Public Works & Utilities Department.
 - 1.1.2 The sanitary sewer in the northeast corner of the plat to the satisfaction of the Public Works & Utilities Department.
 - 1.1.3 Sanitary sewer extended to the property lines at drainage basin entry points to the satisfaction of the Public Works & Utilities Department.
 - 1.1.4 An alternate location for the pedestrian easement in Block 12 leading to the multifamily area.
 - 1.1.5 Sanitary sewer to serve the multifamily area to the satisfaction of the Public Works & Utilities Department.
 - 1.1.6 Grading in NW 41st Court, W. Faesy and NW 47th Streets to the satisfaction of the Public Works & Utilities Department.

- 1.1.7 A note on the plan indicating that a driveway for Lot 30, Block 12 (multi-family area) onto W. Holdrege Street will not be approved until a final site plan is approved.
- 1.1.8 Sanitary sewer in NW 47th Street to meet design standards to the satisfaction of the Public Works & Utilities Department.
- 1.1.9 W. Faesy Place extended north to N 44th Street.
- 1.1.10 Street names to the satisfaction of the Planning Department.
- 1.1.11 Provide pedestrian access in Block 4 as required by Title 26.
- 1.1.12 A note on the plan indicating this area is within the airport environs district, construction must be meet standards as set forth in §27.58 and §27.59 and a Avigation and Noise Easement Agreement must be signed.
- 1.1.13 Noise contours for the Airport Environs LDN per §27.58.080.
- 1.1.14 Revised CUP/Land Use Table so the church lot is not shown as a dwelling unit.
- 1.1.15 Revised waivers table to include the waiver to double frontage lots and waiver to block length in Block 4.
- 1.1.16 Pedestrian way easements over outlots. A general note on the site plan may indicate that final placement of the easement may be determined at time of construction of the pedestrian walks and filed directly with the Register of Deeds.
- 1.1.17 Removed language in Note #18 that implies a waiver to the height of the multi-family buildings.
- 1.1.18 Removed Note #5 because W. Holdrege is a local street.
- 1.1.19 Brian D. Carstens and Associates as engineer or petitioner on the plat.
- 1.1.20 Pedestrian easements highlighted on the site plan.

- 1.1.21 Pedestrian easement in Block 12 with a 5' easement instead of a 25' easement.
- 1.1.22 Add to Note #4 that a private drive to the church lot is to be determined at the time of building permit.
- 1.1.23 Landscaping per design standards for multifamily dwellings and lots backing onto public streets.
- 1.1.24 Right-of-way dedication for W. Holdrege Street to the satisfaction of the Public Works & Utilities and Planning Departments.
- 1.1.25 NW 48th Street grading to full build-out per subdivision standards.
- 1.2 Sign an Avigation and Noise Easement Agreement to the satisfaction of the Lincoln Airport Authority.
- 1.3 Submit a phasing plan to the satisfaction of the Planning and Public Works & Utilities Departments.
- 2. The City Council approves associated request:
 - 2.1 Annexation #02010
 - 2.2 Change of Zone #3390
 - 2.3 Special Permit #1995
 - 2.4 A modification to the requirements of the land subdivision ordinance to permit block lengths to exceed 1,320' in Block 4, Block 6 and Block 12 and to allow double frontage lots for Lots 1, 2, and 3, Block 8.

General:

- 3. Final Plats will be scheduled on the Planning Commission agenda after:
 - 3.1 You have completed or posted a surety to guarantee the completion of the public streets, private roadway improvements, sidewalks, sanitary sewer system, water system, drainage facilities, land preparation and grading, sediment and erosions control measures, storm water detention/retention

facilities, drainageway improvements, street lights, landscaping screens, street trees, temporary turnaround and barricades, and street name signs.

- 3.2 The subdivider has signed an agreement that binds the subdivider, its successors and assigns:
 - 3.2.1 To submit to the Director of Public Works a plan showing proposed measures to control sedimentation and erosion and the proposed method to temporarily stabilize all graded land for approval.
 - 3.2.2 To complete the private improvement shown on the preliminary plat and Community Unit Plan.
 - 3.2.3 To maintain the outlots and private improvements on a permanent and continuous basis. However, the subdivider may be relieved and discharged of this maintenance obligation upon creating in writing a permanent and continuous association of property owners who would be responsible for said permanent and continuous maintenance. The subdivider shall not be relieved of such maintenance obligation until the document or documents creating said property owners association have been reviewed and approved by the City Attorney and filed of record with the Register of Deeds.
 - 3.2.4 To continuously and regularly maintain the street trees along NW 48th Street, the private roadways and landscape screens.
 - 3.2.5 To submit to the lot buyers and home builders a copy of the soil analysis.
 - 3.2.6 To pay all improvement costs.
 - 3.2.7 To comply with the provisions of the Land Preparation and Grading requirements of the Land Subdivision Ordinance.
 - 3.2.8 To construct the sidewalk in the pedestrian way easement in Lots 7 & 8, Block 12 and Lots 4, 39, 80 & 81, Block 6 at the same time as NW 46th Street, W. Faesy Place and W. Milton Road are paved and to agree that no building permit shall be issued for construction on the adjacent lots on both sides of the easement until such time as the sidewalk in the pedestrian way easement is constructed.
 - 3.2.9 To perpetually maintain the sidewalks in the pedestrian way easements at their own cost and expense.

- 3.2.10 To protect the trees that are indicated to remain during construction and development.
- 3.2.11 To properly and continuously maintain and supervise the private facilities which have common use or benefit, and to recognize that there may be additional maintenance issues or costs associated with providing for the proper functioning of storm water detention/retention facilities as they were designed and constructed within the development, and that these are the responsibility of the land owner.
- 3.2.12 To relinquish the right of direct vehicular access from Lots 22-26, Block 8, Lots 1-12, Block 1 to NW 48th Street except as shown on the site plan.
- 3.2.13 To inform all purchasers and users that the land is located within the turning zone of the Airport Environs District and that all construction shall be in conformance with the airport zoning requirements and the aviation and noise easement and covenant agreement.

SPECIAL PERMIT CONDITIONS:

Site Specific:

1. After the applicant completes the following instructions and submits the documents and plans to the Planning Department office and the plans are found to be acceptable, the application will be scheduled on the City Council's agenda:

- 1.1 Revise the site plan to show:
 - 1.1.1 All changes required on the preliminary plat.

2. This approval permits 869 dwelling units.

General:

- 3. Before receiving building permits:
 - 3.1 The permittee shall have submitted a revised and reproducible final plan including 6 copies showing the following revisions and the plans are acceptable:
 - 3.2 The construction plans shall comply with the approved plans.


3.3 Final Plats shall be approved by the City.

STANDARD CONDITIONS:

4. The following conditions are applicable to all requests:
 - 4.1 Before occupying the dwelling units all development and construction shall have been completed in compliance with the approved plans.
 - 4.2 All privately-owned improvements shall be permanently maintained by the owner or an appropriately established homeowners association approved by the City Attorney.
 - 4.3 The site plan accompanying this permit shall be the basis for all interpretations of setbacks, yards, locations of buildings, location of parking and circulation elements, and similar matters.
 - 4.4 This resolution's terms, conditions, and requirements bind and obligate the permittee, its successors and assigns.
 - 4.5 The applicant shall sign and return the letter of acceptance to the City Clerk within 30 days following the approval of the special permit, provided, however, said 30-day period may be extended up to six months by administrative amendment. The clerk shall file a copy of the resolution approving the special permit and the letter of acceptance with the Register of Deeds, filling fees therefor to be paid in advance by the applicant.

Prepared by:


Becky Horner
Planner

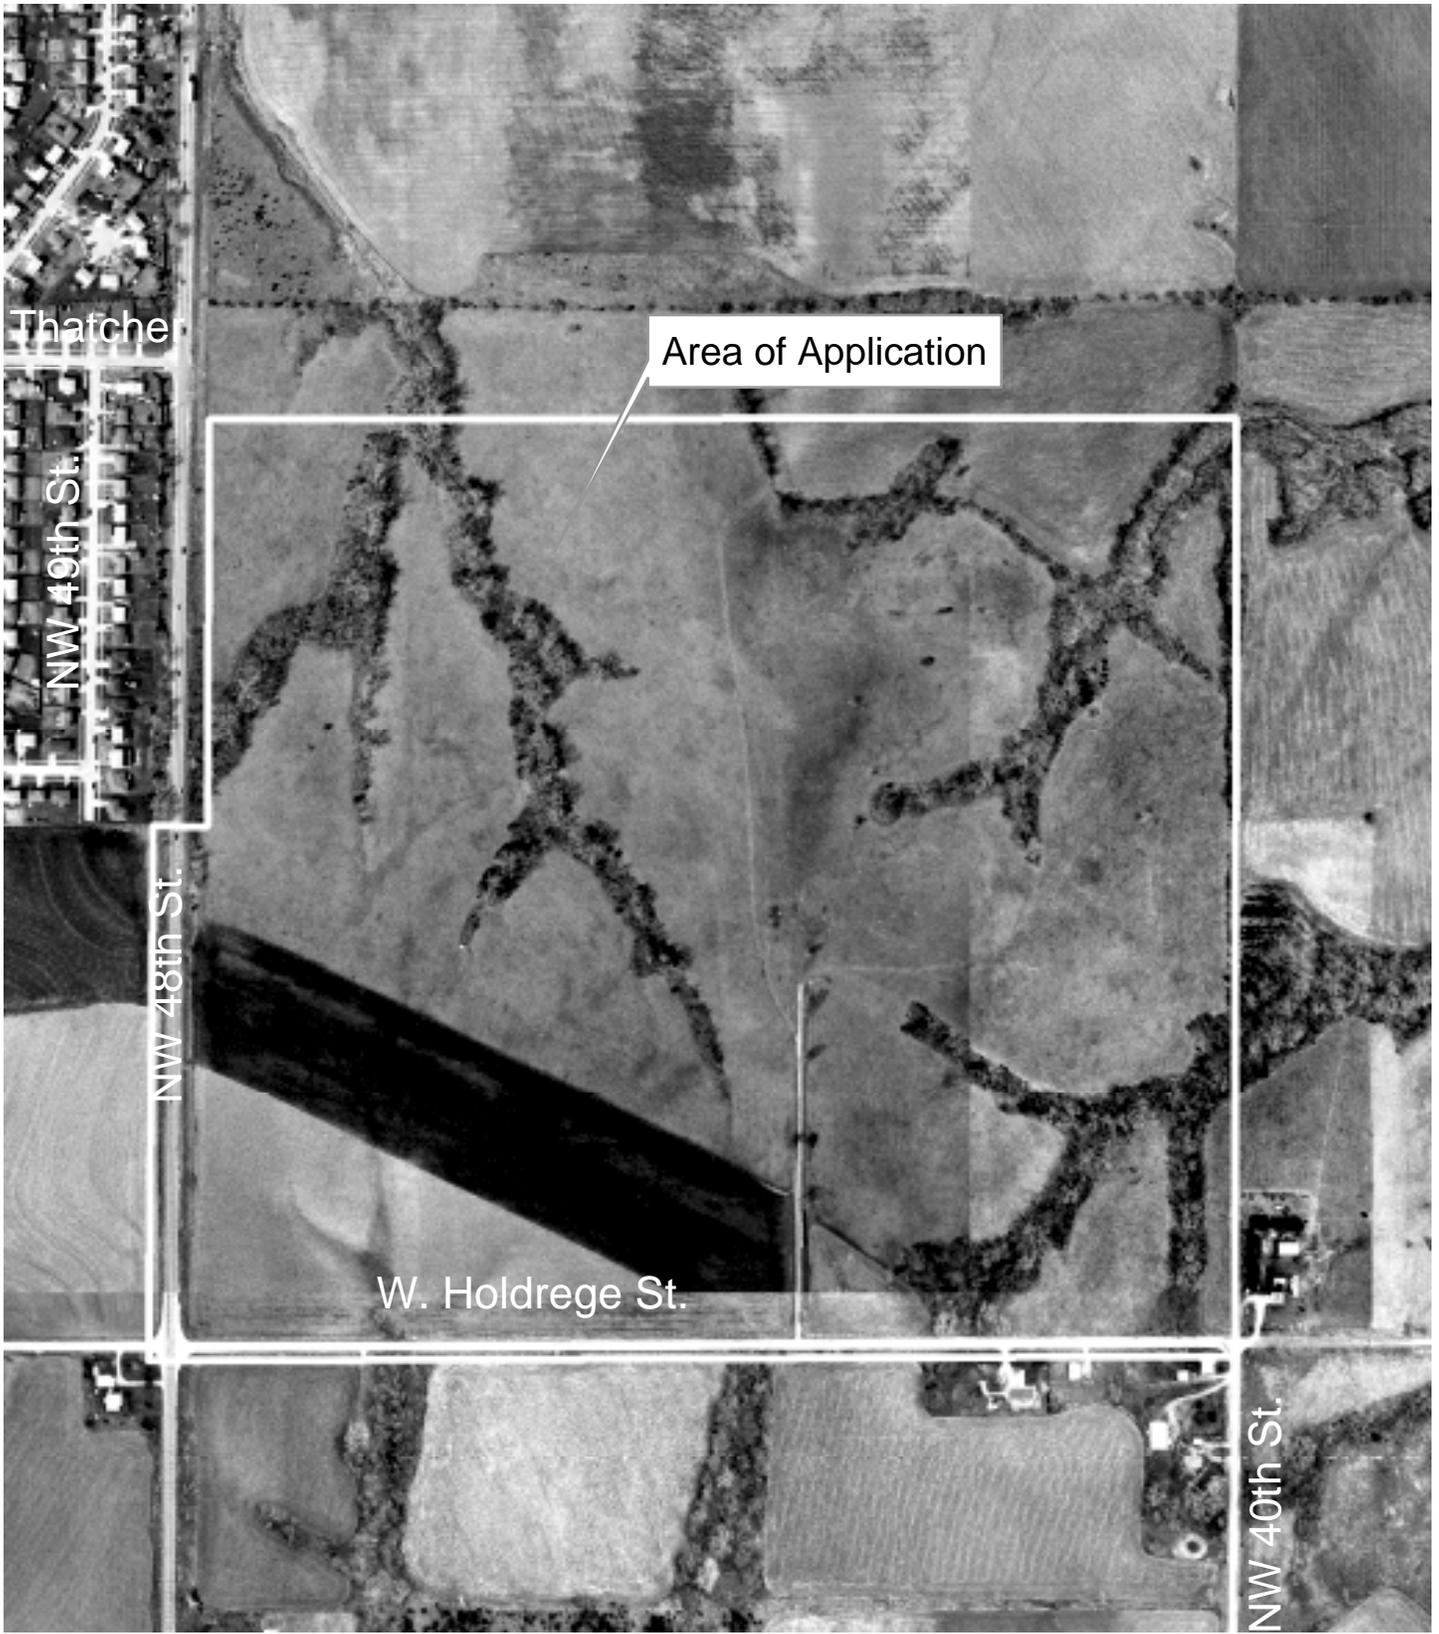

**Annexation #02010
Hub Hall Heights
NW 48th & W Holdrege**



Lincoln City - Lancaster County Planning Dept.
1999 Aerial

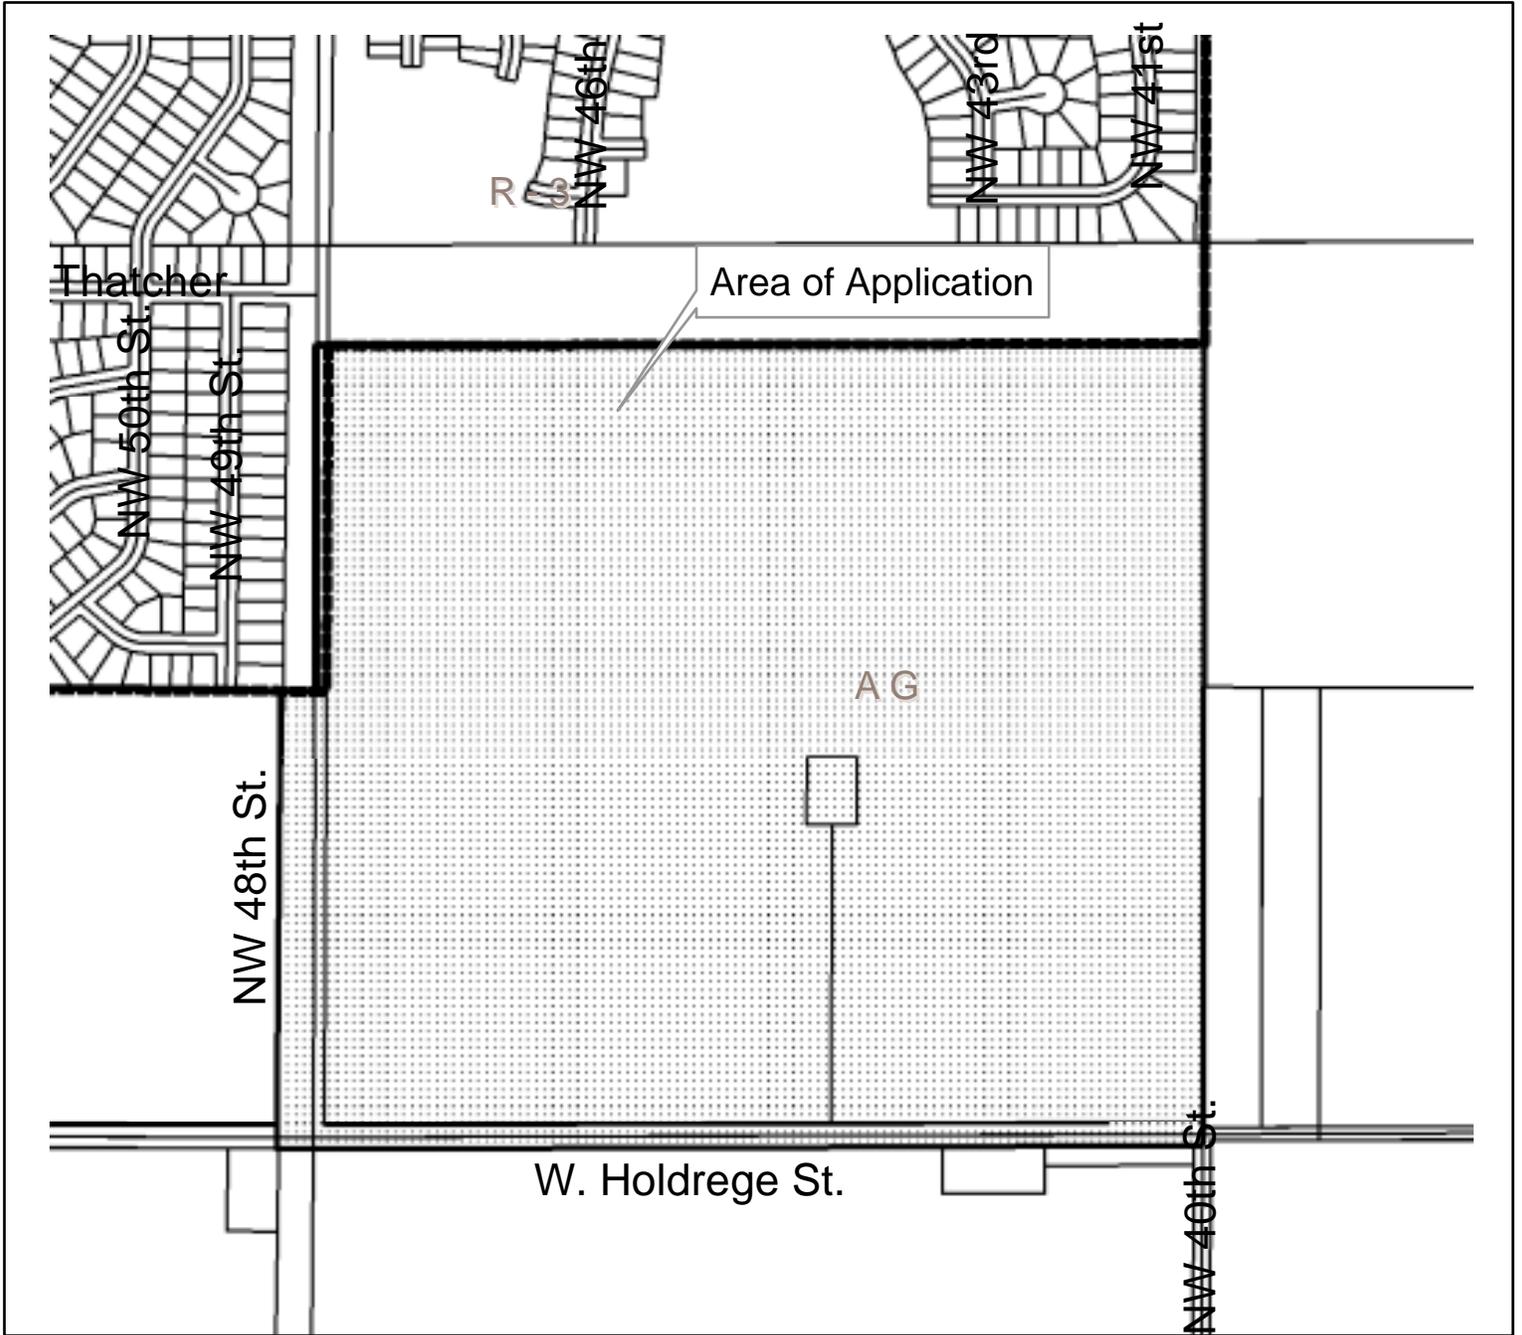

Annexation #02010



Hub Hall Heights

NW 48th & W Holdrege

Zoning:

- R-1 to R-8 Residential District
- AG Agricultural District
- AGR Agricultural Residential District
- R-C Residential Conservation District
- O-1 Office District
- O-2 Suburban Office District
- O-3 Office Park District
- R-T Residential Transition District
- B-1 Local Business District
- B-2 Planned Neighborhood Business District
- B-3 Commercial District
- B-4 Lincoln Center Business District
- B-5 Planned Regional Business District
- H-1 Interstate Commercial District
- H-2 Highway Business District
- H-3 Highway Commercial District
- H-4 General Commercial District
- I-1 Industrial District
- I-2 Industrial Park District
- I-3 Employment Center District
- P Public Use District

One Square Mile
Sec. 18 T10N R6E

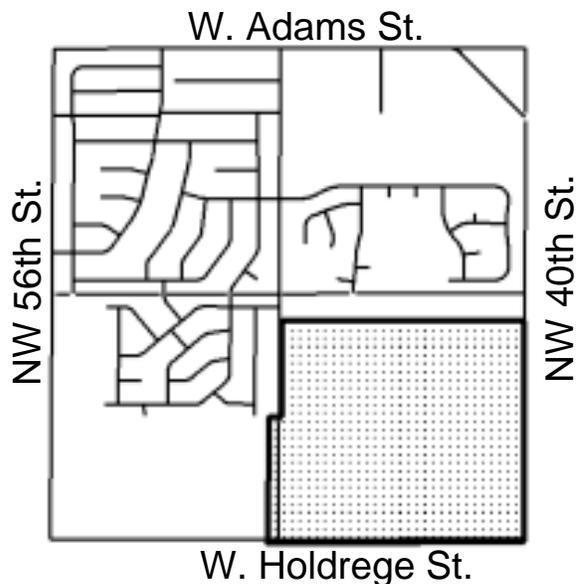




**Preliminary Plat #02025
Change of Zone #3290
Special Permit #1995
Hub Hall Heights
NW 48th & W Holdrege**





Lincoln City - Lancaster County Planning Dept.
1999 Aerial

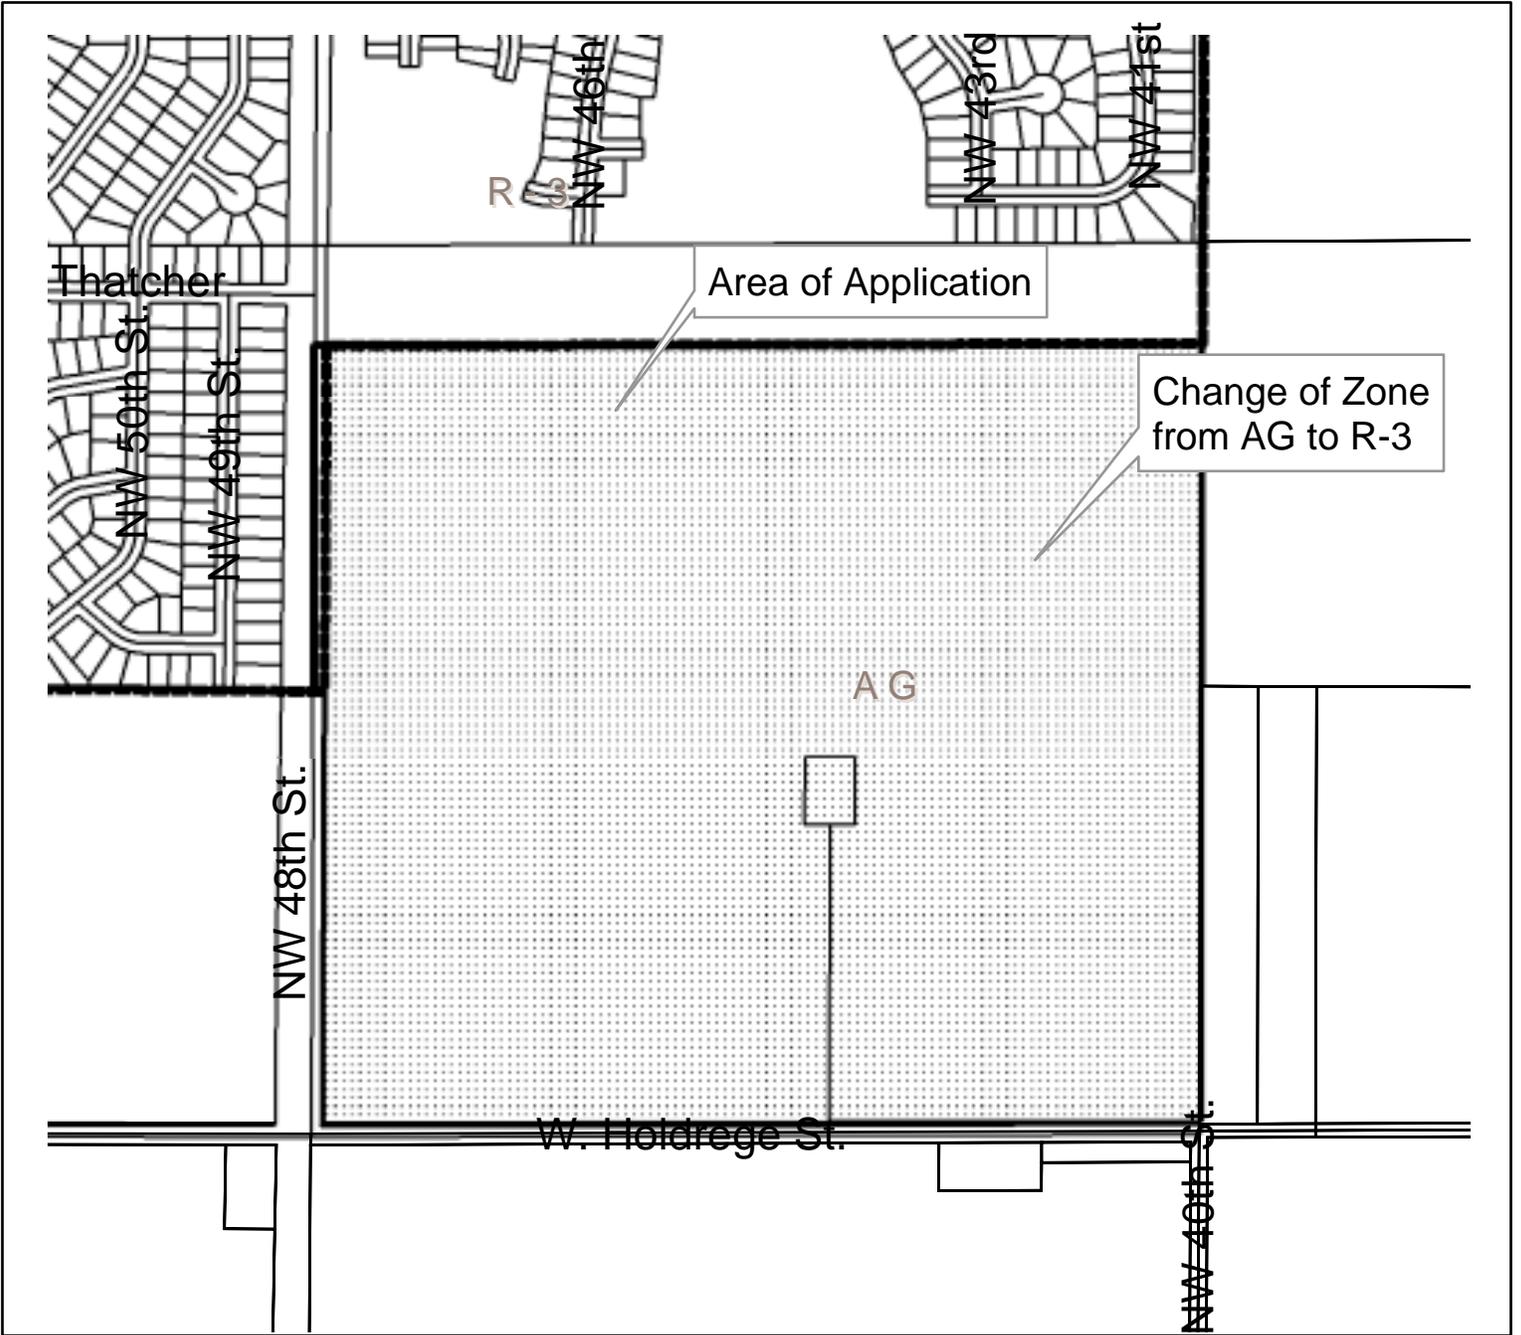


Preliminary Plat #02025
Change of Zone #3290
Special Permit #1995
Hub Hall Heights
NW 48th & W Holdrege
Zoning:

- R-1 to R-8 Residential District
- AG Agricultural District
- AGR Agricultural Residential District
- R-C Residential Conservation District
- O-1 Office District
- O-2 Suburban Office District
- O-3 Office Park District
- R-T Residential Transition District
- B-1 Local Business District
- B-2 Planned Neighborhood Business District
- B-3 Commercial District
- B-4 Lincoln Center Business District
- B-5 Planned Regional Business District
- H-1 Interstate Commercial District
- H-2 Highway Business District
- H-3 Highway Commercial District
- H-4 General Commercial District
- I-1 Industrial District
- I-2 Industrial Park District
- I-3 Employment Center District
- P Public Use District


One Square Mile
 Sec. 18 T10N R6E

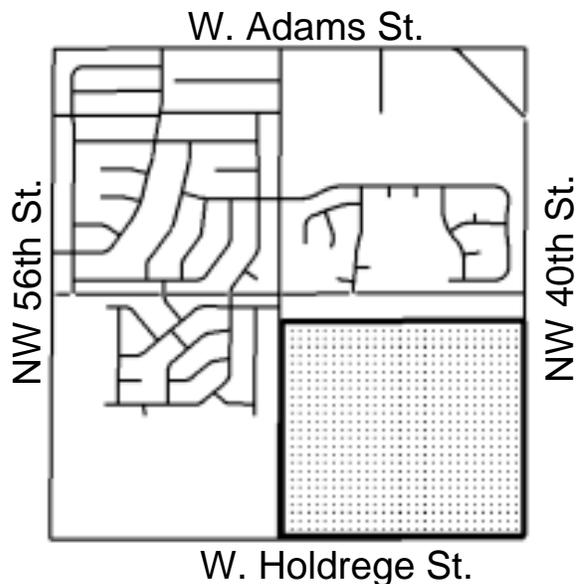

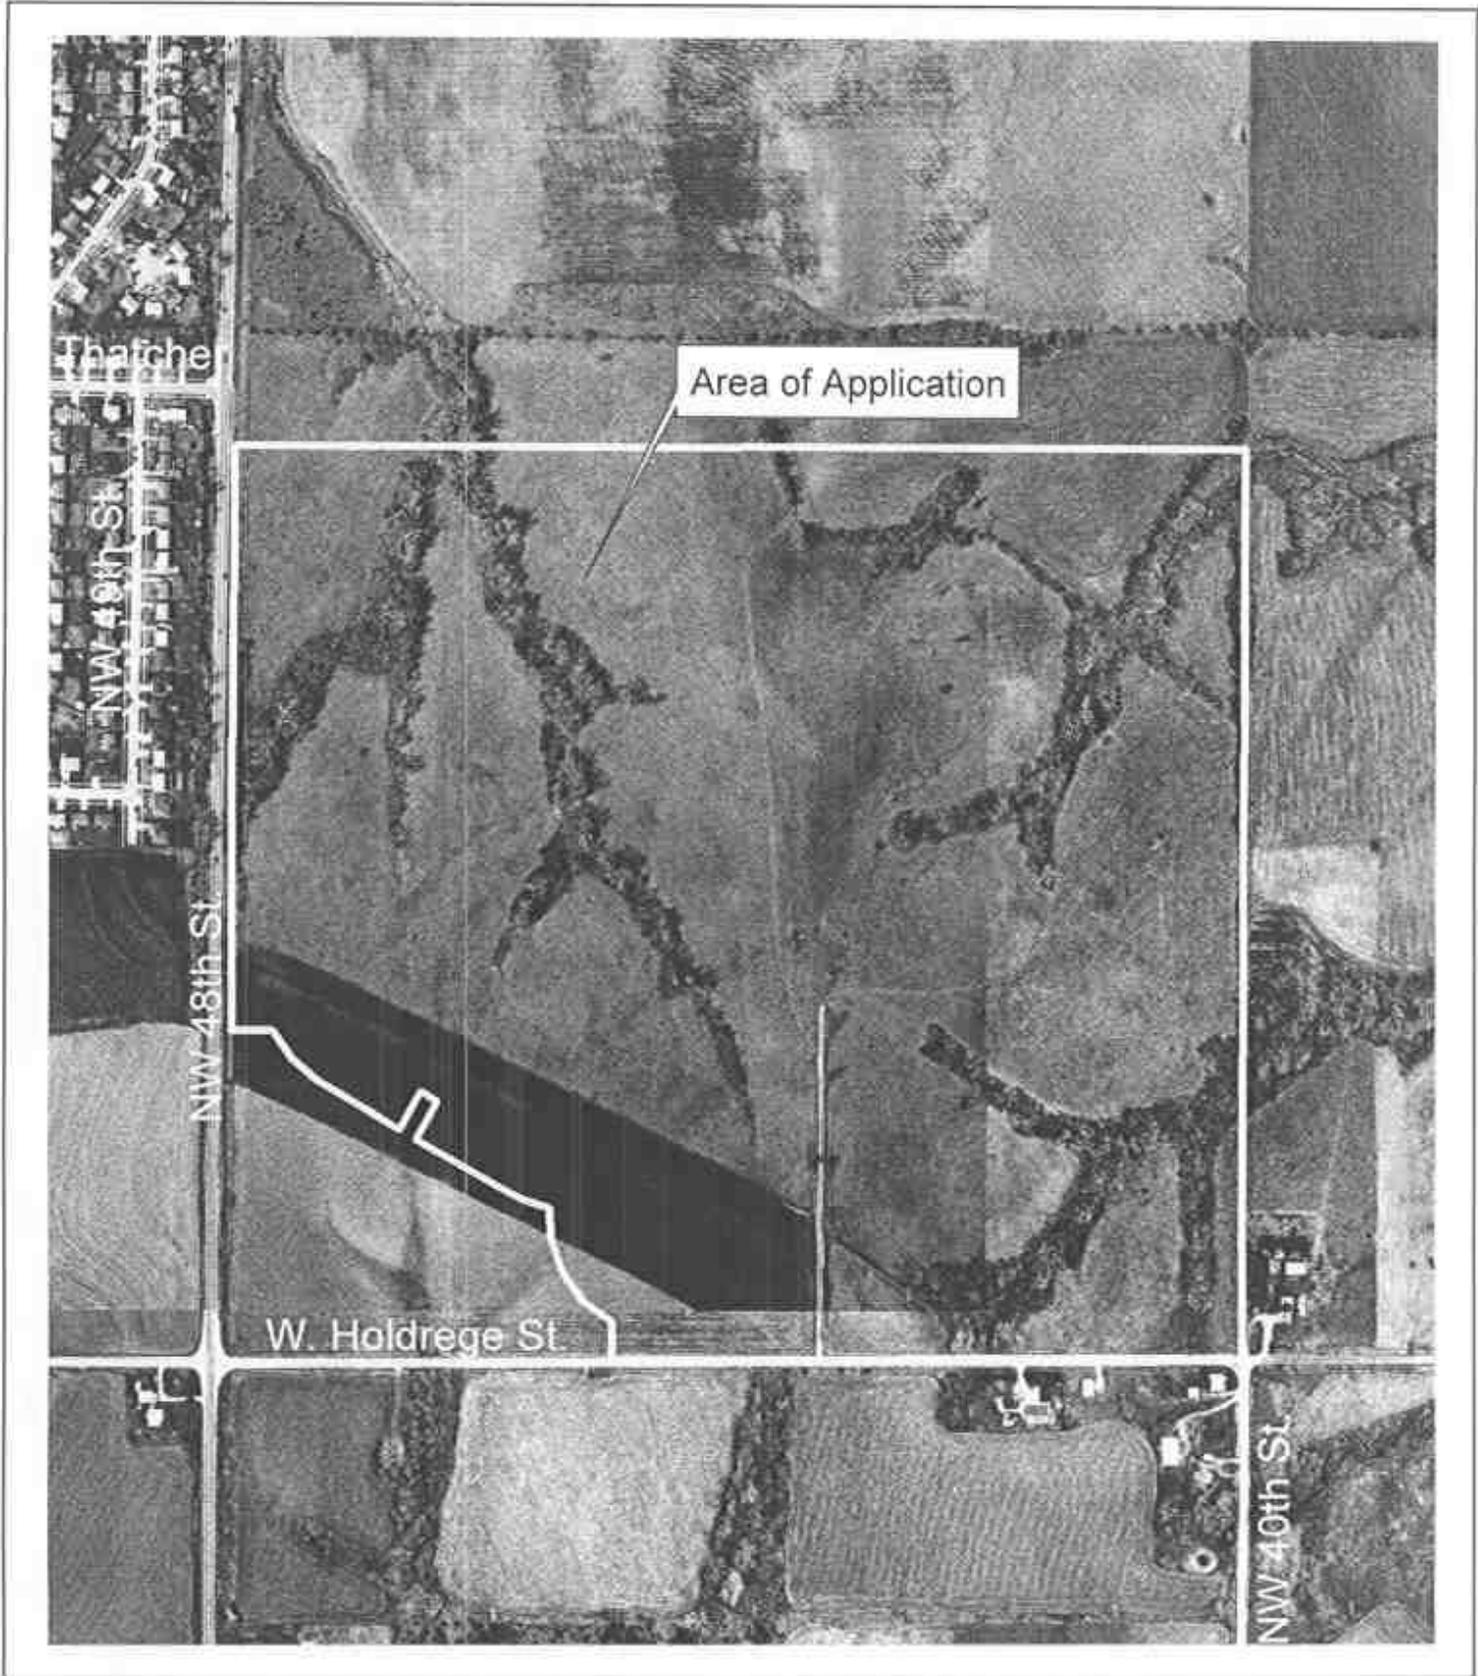

**Special Permit #1995
Hub Hall Heights
NW 48th & W Holdrege**




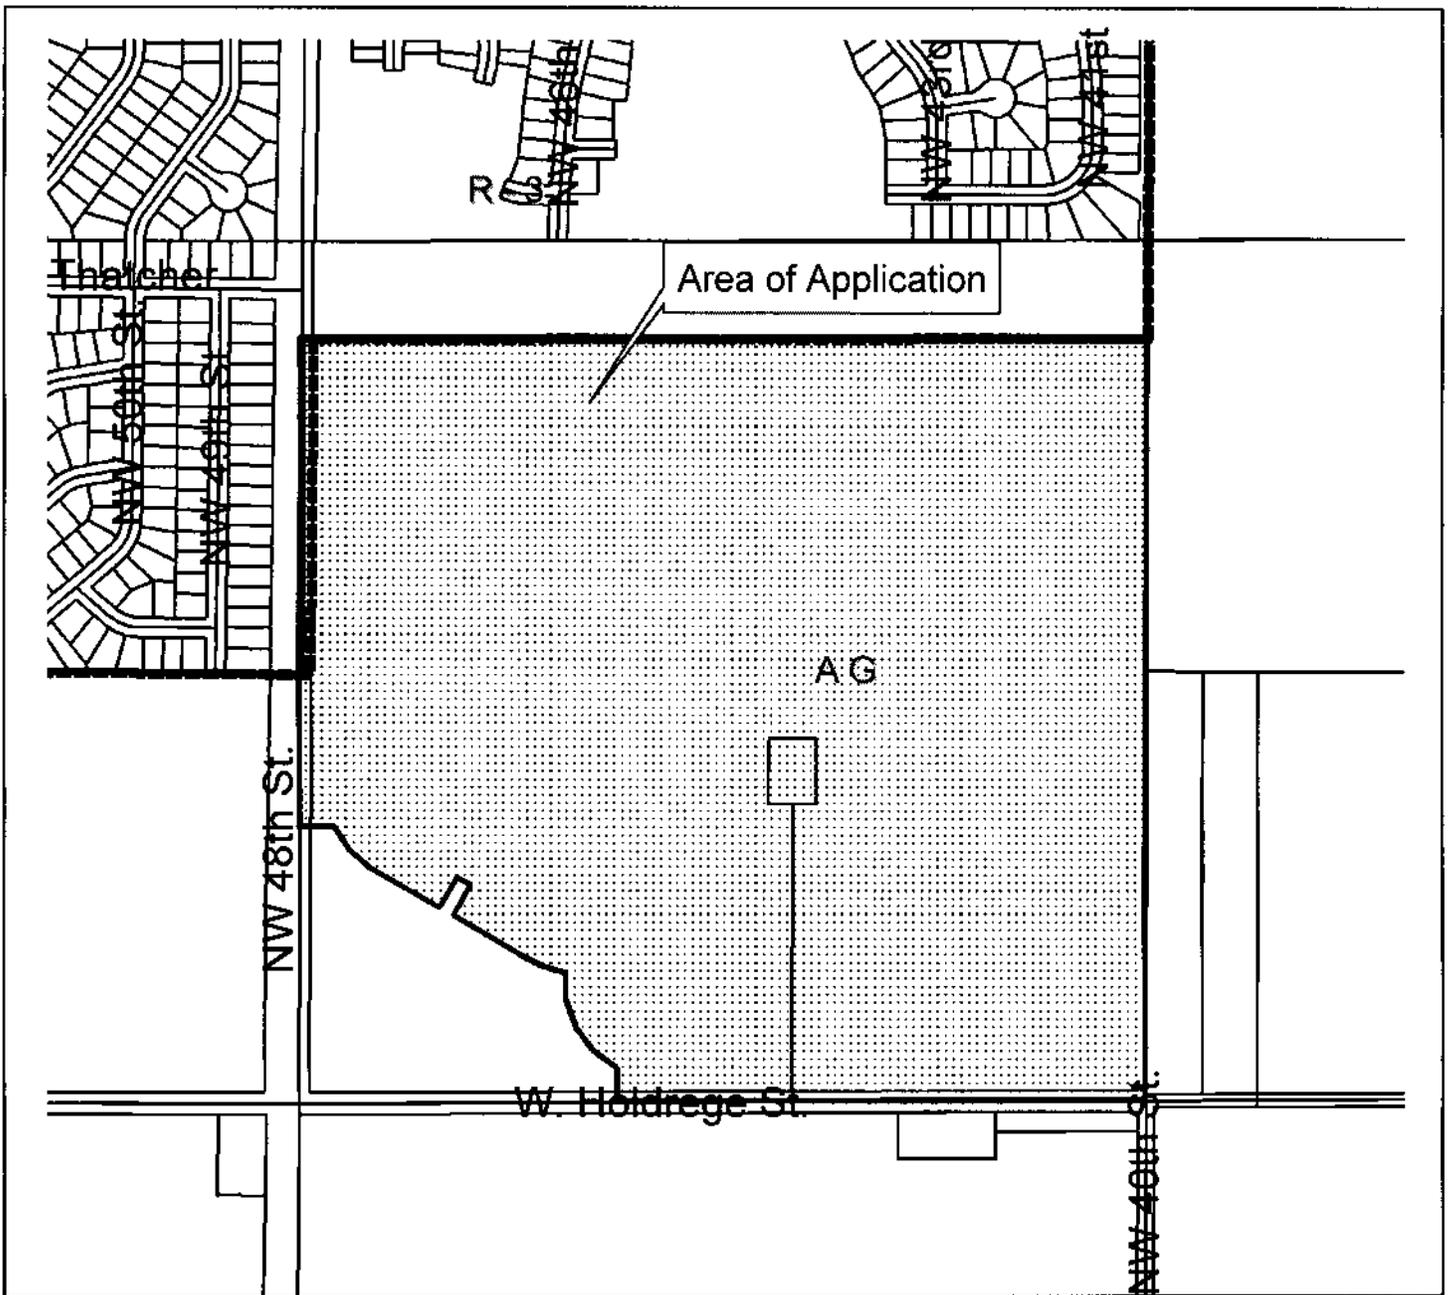


Special Permit #1995 Hub Hall Heights NW 48th & W Holdrege

Zoning:

- R-1 to R-8 Residential District
- AG Agricultural District
- AGR Agricultural Residential District
- R-C Residential Conservation District
- O-1 Office District
- O-2 Suburban Office District
- O-3 Office Park District
- R-T Residential Transition District
- B-1 Local Business District
- B-2 Planned Neighborhood Business District
- B-3 Commercial District
- B-4 Lincoln Center Business District
- B-5 Planned Regional Business District
- H-1 Interstate Commercial District
- H-2 Highway Business District
- H-3 Highway Commercial District
- H-4 General Commercial District
- I-1 Industrial District
- I-2 Industrial Park District
- I-3 Employment Center District
- P Public Use District

One Square Mile
Sec. 18 T10N R6E

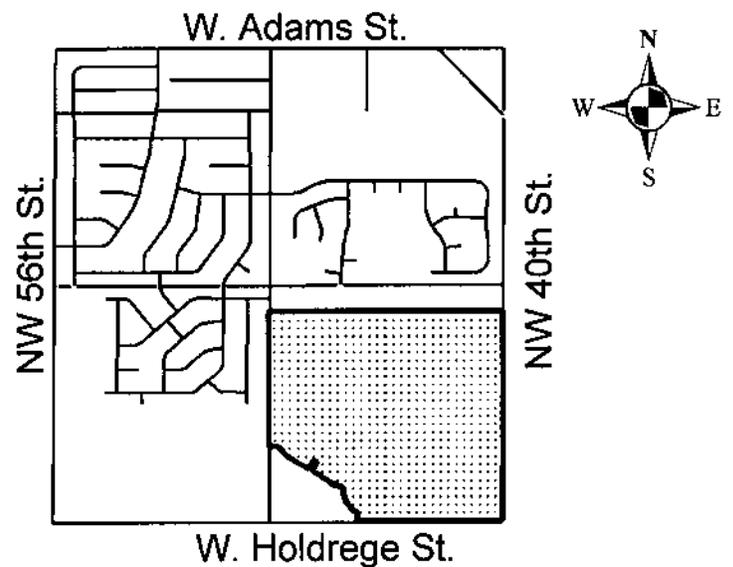

**COMMUNITY UNIT PLAN
LEGAL DESCRIPTION:**

Lot 14 and a portion of Lot 32 of irregular tracts located in the Southeast Quarter of Section 18, Township 10 North, Range 6 East of the 6th P.M., Lincoln, Lancaster County, Nebraska and wholly described as follows:

Referring to the Southwest corner of the Southeast Quarter of said Section 18; THENCE in a Northerly direction, along the West line of the Southeast Quarter of said Section 18, on an assumed bearing of North 00 degrees 45 minutes 21 seconds West for a distance of 846.58 feet to the Point of Beginning.

THENCE continuing in a Northerly direction, along the West line of the Southeast Quarter of said Section 18, on an assumed bearing of North 00 degrees 45 minutes 21 seconds West for a distance of 1502.37 feet to the Northwest corner of said Lot 32;

THENCE North 88 degrees 49 minutes 52 seconds East, along the North line of said Lot 32, for a distance of 2639.59 feet to the Northeast corner of said Lot 32

THENCE South 00 degrees 50 minutes 46 seconds East, along the East line of the Southeast Quarter of said Section 18, for a distance of 2347.52 feet to the Southeast corner of the Southeast Quarter of said Section 18

THENCE South 88 degrees 48 minutes 02 seconds West, along the South line of the Southeast Quarter of said Section 18, for a distance of 1644.57 feet

THENCE North 01 degrees 11 minutes 58 seconds West, for a distance of 98.76 feet

THENCE North 55 degrees 35 minutes 05 seconds West, for a distance of 90.94 feet

THENCE North 38 degrees 08 minutes 59 seconds West, for a distance of 90.94 feet

THENCE North 20 degrees 42 minutes 53 seconds West, for a distance of 90.94 feet

THENCE North 04 degrees 39 minutes 24 seconds West, for a distance of 81.24 feet

THENCE North 73 degrees 00 minutes 50 seconds West, for a distance of 76.38 feet

THENCE North 64 degrees 18 minutes 00 seconds West, for a distance of 73.59 feet

THENCE North 61 degrees 12 minutes 11 seconds West, for a distance of 241.00 feet

THENCE North 28 degrees 47 minutes 49 seconds East, for a distance of 110.00 feet

THENCE North 61 degrees 12 minutes 11 seconds West, for a distance of 50.00 feet

THENCE South 28 degrees 47 minutes 49 seconds West, for a distance of 110.00 feet

THENCE North 61 degrees 12 minutes 11 seconds West, for a distance of 247.65 feet

THENCE North 50 degrees 02 minutes 26 seconds West, for a distance of 86.46 feet

THENCE North 35 degrees 50 minutes 24 seconds West, for a distance of 86.53 feet

THENCE South 89 degrees 14 minutes 39 seconds West, for a distance of 109.34 feet to the Point of Beginning

Together with and subject to covenants, easements, and restrictions of record. Said property contains 129.81 acres more or less.



LYLE L. LOTH, P.E./L.S.

November 6, 2002

Suite A - 601 Old Cheney Road
Lincoln, NE 68512

Phone (402) 421-2500

Fax (402) 421-7096

Email: lyle@espeng.com

Mr. Marvin Krout
Director of Planning
City of Lincoln/ Lancaster County
555 South 10th Street
Lincoln, NE 68508

RE: HUB HALL HEIGHTS
PRELIMINARY PLAT & COMMUNITY UNIT PLAN
CHANGE OF ZONE ('AG' TO 'R-3') & ANNEXATION

Dear Mr. Krout,

On behalf of Hubert H. Hall, we submit the above mentioned applications for your review. This site contains 142.39 acres and is currently zoned 'AG' and we are proposing 'R-3' with a C.U.P..

The area of the project is located outside the city limits. We are requesting to be annexed into the city limits at this time.

We have completed density calculations which shows 953 units are the total units allowed. We are proposing to develop 357 single-family lots/units, one multi-family lot with 400 units, one future church lot, 195 unassigned units and 5 outlots. The unassigned units shall be used to add single family, duplex lots and/or single family attached. The proposed development has public streets with public water, public sanitary sewer and public storm sewer to serve the site. There will be a Homeowners Association for maintenance of the outlots, which serves as detention and open space.

We have shown a right-of-way dedication 60 feet along N.W. 48th Street. It has come to our knowledge that the development to the north (Ashley Heights), was allowed to dedicated only 40 feet of right-of-way. If there is a possibility for us to match that it would allow us to increase the lot depth adjacent to N.W. 48th Street and may allow more grading alternatives for the public sidewalk.

We are requesting the following waivers to maintain existing drainage, tree masses and natural topography:

1. Block length on the east side of N.W. 46th Street from 1,320 feet to 1,763.75 feet. Block length on the south side of W. Hall Drive from 1,320 feet to 1,410.84 feet. Block length on the east and south side of N.W. 45th Street/W. Keady Lane/N.W. 41st Street from 1,320 feet to 2,260.71 feet. Block length on the north and west side of W. Keady Lane/N.W. 41st Street from 1,320 feet to 1,354.25 feet.


NOV - 6 2002

L. LOTH

Page 2

Please contact me if you have any further questions.

Sincerely,




Lyle L. Loth

cc. Hubert H. Hall
Brian D. Carstens

ENCLOSURES:

- 21 copies of sheet 1 of 8
- 6 copies of sheets 2 through 8 of 8
- Application for a Special Permit & Change of Zone
- Application for a Preliminary Plat
- Certificate of Ownership
- Application fees of \$2,985.00
- 8-1/2" x 11" reductions of the plans
- 3 copies of Preliminary Soils Analysis
- 2 copies of Storm Water Detention Calculations



Memorandum

To:	Becky Horner, Planning Department
From:	Chad Blahak, Public Works and Utilities
Subject:	Hub Hall Heights Addition Preliminary Plat and C.U.P./Special Permit
Date:	1/22/03
cc:	Randy Hoskins Dennis Bartels Nicole Fleck-Tooze Virendra Singh Ben Higgins

Engineering Services has reviewed the re-submitted preliminary plat and community unit plan for Hub Hall Heights Addition, located east of N.W. 48th Street, north of Holdrege Street and has the following additional comments & clarifications concerning this plat::

The existing culvert in N.W. 48th Street needs to be shown as per the meeting.

The sanitary sewer needs to be revised in the north east corner of the plat. It is currently located under the dam of a proposed detention facility. This is unacceptable.

Sanitary sewer has not been extended to the property lines at drainage basin entry points into the development as per the planning directors letter dated December 10, 2002.

The proposed alternate to serve the proposed apartment complex with a lift station is unsatisfactory. The apartment lot cannot be developed until a sewer outlet is available from the east.

The grading in N.W. 41st Court, West Faesy Street, and N.W. 47th Street needs to be revised as per the meeting January 22, 2003. Due to the large grade changes front to back across several areas on this plat Public works recommends that the grading plan and /or lot layout be revised to provide more desirable lots for building.

Public Works does not approve any drive way location for Lot 30 Block 12 onto Holdrege Street until a final site plan and use for the lot is approved.


The information shown on the preliminary plat relating to the public water main system, public sanitary sewer system, and public storm sewer system has been reviewed to determine if the

sizing and general method providing service is satisfactory . Design considerations including, but not limited to, location of water main bends around curves and cul-de-sacs, connection of fire hydrants to the public main, temporary fire hydrant location, location and number of sanitary sewer manholes, location and number of storm sewer inlets, location of storm sewer manholes and junction boxes, and the method of connecting storm sewer inlets to the main system are not approved with this review. These and all other design considerations can only be approved at the time construction drawings are prepared and approved.

I:\FILES\sieceb\wp\Pre-Plat-Memos\Hubhalheights-memo3.wpd

M e m o r a n d u m

To: Becky Horner, Planning Department
From: ^{CB} Chad Blahak, Public Works and Utilities
Subject: Hub Hall Heights Addition Preliminary Plat and C.U.P./Special Permit
Date: January 21, 2003
cc: Randy Hoskins
Dennis Bartels
Nicole Fleck-Tooze
Virendra Singh
Ben Higgins

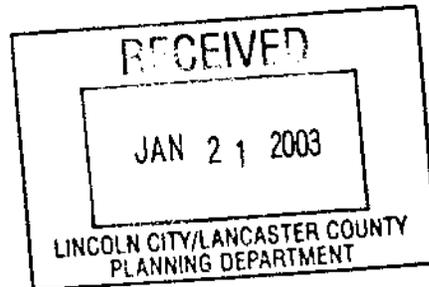

Engineering Services has reviewed the re-submitted preliminary plat and community unit plan for Hub Hall Heights Addition, located east of Northwest 48th Street, north of Holdrege Street and has the following comments:

- Public Works has additional concerns about the grading and drainage plan and wishes to meet with the developers engineer to discuss said issues and required revisions to the drainage study and grading plan.
- The sanitary sewer in Northwest 47th Street is shown to be 15' deep at the north property line. The sewer will run opposite street grade in Northwest 47 Street until the first east-west street in the Ashley Heights 1st Addition development to the north. This will force the sewer to be deeper than 15'. No waivers of design standards for sewer depth have been approved for the Ashley Heights 1st development. The sewer in this plat will be less than 15' deep at the property line.
- Sanitary sewer has not been extended to the property lines at drainage basin entry points into the development as per the planning directors letter dated December 10, 2002.
- The proposed alternate to serve the proposed apartment complex with a lift station is unsatisfactory. The apartment lot cannot be developed until a sewer outlet is available from the east.
- The annexation agreement for this plat should require this development to pay for the equivalent of $\frac{1}{2}$ the cost of a 6" water main for its frontage on the existing and proposed 16" and 12" main in Northwest 48th Street.
- Public Works does not approve any drive way location for Lot 30 Block 12 onto Holdrege Street until a final site plan and use for the lot is approved.

Becky Horner, Planning Department

Page 2

January 21, 2003

- This developer should be required to make a contribution toward the future urban street paving of Northwest 48th Street. With other plats, Public Works has recommended a contribution equivalent to $\frac{1}{2}$ the cost of a 3 lane suburban cross-section street. Allowing the plat adjacent to Northwest 48th Street without requiring an urban cross section is an exception to subdivision ordinance requirements.
- The information shown on the preliminary plat relating to the public water main system, public sanitary sewer system, and public storm sewer system has been reviewed to determine if the sizing and general method providing service is satisfactory. Design considerations including, but not limited to, location of water main bends around curves and cul-de-sacs, connection of fire hydrants to the public main, temporary fire hydrant location, location and number of sanitary sewer manholes, location and number of storm sewer inlets, location of storm sewer manholes and junction boxes, and the method of connecting storm sewer inlets to the main system are not approved with this review. These and all other design considerations can only be approved at the time construction drawings are prepared and approved.

City of Lincoln, Nebraska

IMPORTANT

All revisions to plans must include Building Permit # and Job Address.

Return this report with two sets of corrected plans. The corrections noted below are required to be made to the plans prior to issuance of a permit. Please indicate under each item where the correction is made by plan sheet number or plan detail number.

A separate set of plans for review and final approval must be submitted by the licensed installing contractor/s if fire suppression systems, sprinklers, dry powder, fire alarm systems or underground tanks are installed.

Plan Review Comments

Permit # **DRF03001**

Address

Job Description: Development Review - Fire

Location: HUB HALL HEIGHTS


Special Permit: Y 1995

Preliminary Plat: Y 02025

Use Permit:

CUP/PUD:

Requested By **BECKY HORNER**



Status of Review: Denied

01/10/2003 11:28:09 AM

Reviewer: FIRE PREVENTION/LIFE SAFETY CODE

BOB FIEDLER

Comments: apartment complex will require private fire hydrant system.

Current Codes in Use Relating to Construction Development in the City of Lincoln:

- 2000 International Building Code and Local Amendments
- 2000 International Residential Code and Local Amendments
- 1994 Nebraska Accessibility Guidelines (Patterned after and similar to ADA guidelines)
- 1989 Fair Housing Act As Amended Effective March 12, 1989
- 1979 Zoning Ordinance of the City of Lincoln as Amended including 1994 Parking Lot Lighting Standards
- 1992 Lincoln Plumbing Code (The Lincoln Plumbing Code contains basically the 1990 National Standard Plumbing Code and local community Amendments.)
- 1999 National Electrical Code and Local Amendments
- 1997 Uniform Mechanical Code and Local Amendments
- 1994 Lincoln Gas Code
- 1994 NFPA 101 Life Safety Code
- 2000 Uniform Fire Code and Local Amendments
- Applicable NFPA National Fire Code Standards

**LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
INTER-OFFICE COMMUNICATION**

TO: Becky Horner

DATE: November 27, 2002

DEPARTMENT: Planning

FROM: Chris Schroeder
Ron Marquart

ATTENTION:

DEPARTMENT: Health

CARBONS TO: Bruce Dart, Director
EH File
EH Administration

SUBJECT: Hub Hall Heights
PP #02025, CZ #3390
SP #1995, Annex #02010

The Lincoln-Lancaster County Health Department (LLCHD) has reviewed the plat for the proposed Hub Hall Heights and conducted an on-site visit. There are no existing homes on this proposed plat. This plat consists of native prairie grassland and narrow tree growth areas in the drainage ways. The following items are noted:

- Water supply is proposed to be the City of Lincoln Water System.
- Sewage is proposed to be the Lincoln Wastewater System.
- All wind and water erosion must be controlled during construction. The Lower Platte South Natural Resources District should be contacted for guidance in this matter.
- During the construction process, the land owner(s) will be responsible for controlling off-site dust emissions in accordance with Lincoln-Lancaster County Air Pollution Regulations and Standards Article 2 Section 32. Dust control measures shall include, but not limited to application of water to roads, driveways, parking lots on site, site frontage and any adjacent business or residential frontage. Planting and maintenance of ground cover will also be incorporated as necessary.
- Provisions should be made for retaining as much tree mass as possible. Alternately, the applicant will need to plan for disposal of tree waste by burying on site, grinding, offering for firewood or hauling to the landfill. Permits for open burning of tree waste within the city limits will not be approved and applications for burning within the 3-mile zone are unlikely to be approved.

-LES INTER-DEPARTMENT COMMUNICATION

DATE November 19, 2002
TO Becky Horner, City Planning
FROM Sharon Theobald
(Ext. 7640)
SUBJECT DEDICATED EASEMENTS
DN #18N-44W

Attached is the Preliminary Plat for Hub Hall Heights.


In reviewing the dedicated transmission line or other electrical easements shown on this plat, LES does not warrant, nor accept responsibility for the accuracy of any such dedicated easements.

ALLTEL, Time Warner Cable, and the Lincoln Electric System will require the additional easements marked in red on the map, along with blanket utility easements over all of the Outlots and a blanket utility easement, excluding building envelopes, over Lot 30, Block 11.

Sharon Theobald

ST/ss
Attachment
c: Terry Wiebke
Easement File

OFFICE\G\O\DEEAS.Fm



Richard J Furasek

To: Rebecca D Horner/Notes@Notes

cc:

11/08/2002 09:46 AM

Subject: Hub Hall Heights

I have reviewed the preliminary plat#02025, special permit #1995, CZ#3390, and annex#02010 and find it acceptable to department's standards and am awaiting the final plat to see where fire hydrants are placed.

Richard J. Furasek
Assistant Chief Operations
Lincoln Fire & Rescue
1801 Q Street
Lincoln Ne. 68508
Office 402-441-8354
Fax 402-441-8292



MICHAEL WOOLMAN
<lpd737@CJIS.CI.LIN
COLN.NE.US>

To: R Horner <RHorner@ci.lincoln.ne.us>
cc:
Subject: Hub Hall Heights

11/11/2002 11:06 AM

Becky,

The Lincoln Police Department has no objections to the Hub Hall Heights SP #1905 and PP #02025.

Michael S. Woolman
Planning Sergeant
Lincoln Police Department

SUPERVISOR, CUSTOMER SERVICE SUPPORT



November 8, 2002

Becky Horner
City-County Planning Department
555 So 10 St
Lincoln NE 68508-3992

SUBJECT: Hub Hall Heights

Becky,

I have reviewed the above-mentioned request.


I find no concerns on behalf of the United States Postal Service and would agree with this proposal as submitted.

Please feel free to call me with any questions.

Thank you,

A handwritten signature in cursive script, appearing to read "Rod L. Faulkner".

Rod L. Faulkner
Acting Customer Service Support Supervisor

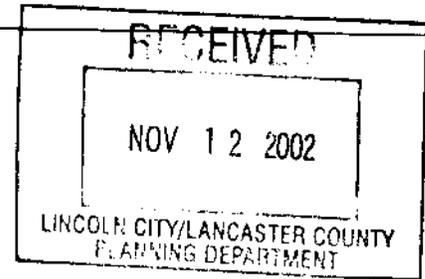

ROD FAULKNER
ACTING SUPV, CUST SERV SUPPORT
700 R ST RM 201
LINCOLN NE 68501-9662
(402) 473-1627
FAX: (402) 473-1795

Memo



To: Becky Horner, Planning Department

From: Mark Canney, Parks & Recreation

Date: November 12, 2002

Re: Hub Hall Heights SP 1995 PP 02025 CZ 3390 Annex # 02010

Staff members of the Lincoln Parks and Recreation Department have conducted a plan review of the above-referenced application/proposal and have no comments.

If you have any additional questions, comments or concerns, please feel free to contact me at 441-8248. Thank you.



Dennis L Roth

01/26/2003 08:05 PM

To: Rebecca D Horner/Notes@Notes
cc:
Subject: re: HUB HII Heights

PROJ NAME: Hub Hall Heights
PROJ NMBR: PP 02025 SP 1995
PROJ DATE: 06/06/03
PLANNER: Becky Horner

Finding TWO DUPLICATE/SIMILAR sounding names in our geobase for the street name proposed in this project, other than those which are an extension of an existing street.

PROPOSED

W Louise
W Jewel

DUPLICATE/SIMILAR SOUNDING

Lewis missed this on the first go around
W Joel

STRONGLY RECOMMEND alternate names be selected in order to eliminate any confusion to emergency responders.

Dennis "denny" Roth, ESD II/CAD Admin
Emergency Communications 9-1-1 Center

STREETS: NW 40, NW 41 CT, NW 41 ST, NW 44 ST, NW 45 ST, NW 46 ST, NW 48 ST
W BEWLEY CT, W FAESY PL, W FLANDER ST, W GARY GATELY ST, W HUB HALL
DR, W HANCOCH CT,
W HOLDREGE ST, W JAMES ST, W JEWEL ST, W KEADY LA, W LOUISE LA, W
LUDWIG CIR, W LUDWIG DR,
W MARTI CIR, W MEGAN LA, W MILTON DR, W PATTY LA, W REBECCA LA,



Stephen S Henrichsen

12/27/02 02:59 PM

To: Marvin S Krout/Notes@Notes, Ray F Hill/Notes@Notes
cc: Virendra A Singh/Notes@Notes, Michael D Brienzo/Notes@Notes,
Kelly K Sieckmeyer/Notes@Notes, Kent R Morgan/Notes@Notes,
Rebecca D Horner/Notes@Notes
Subject: West Holdrege, NW 40th to NW 48th

Marvin

As you requested I have searched through the Comp Plan in regards to West Holdrege, NW 40th to NW 48th, which is adjacent to the Hub Hall Heights preliminary plat and CUP.

This segment of road is unclassified currently and is NOT shown on any of future Functional Classification maps of the Comp Plan. It is NOT shown as future arterial nor collector and is not shown for future improvement.

A portion from NW 48th, east approximately 1/4 mile (maybe NW 44th) is shown on the "Tier I and II Right-of-Way" for 120 feet of ROW. This would appear to be done to reflect the intersection improvement of N. W. 48th Street and West Holdrege west of N.W. 48th to NW 70th. Intersection improvements often continue several blocks in all directions and onto roads that are not otherwise shown for improvement.

Steve

Message for Ray Hill